


Shenzhen Wanliang Co., Ltd

With high refresh rate and gray level, the WLR makes good quality pictures. Fast locking system, easy replace module, power & signal 2-in-1, speed up to solve any unexpected situation.

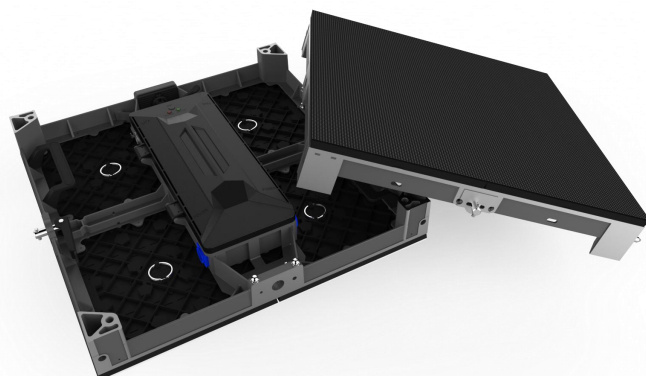

Product Parameter Table

Parameter Name		Product Parameter	
Cabinet Constitution	Pixel Pitch (mm)	P3.9	P4.8
	Led Type	SMD2020	SMD1921
	Cabinet Resolution (WxH)	128x128	104X104
	Cabinet Size (mm) (WxHxD)	500x500x83	500x500x83
	Cabinet Area (m ²)	0.25	0.25
	Cabinet Weight (kg)	7.5	7.5
	Pixel Density (dot/m ²)	65536	43264
	Flatness (mm)	≤0.2	≤0.2
	Maintenance	Front Maintenance	Front Maintenance
	Material	Die Casting Aluminum	Die Casting Aluminum
	Water Proof	Front: IP40,Rear:IP21	Front: IP65,Rear:IP54
Optical Parameters	Brightness Correction	Available	Available
	Color Correction	Available	Available
	Brightness (nits)	800~1000 (Color Temperature 6500K)	3500~4000 (Color Temperature 6500K)
	Color Temperature (K)	2000-10000adjustable	2000-10000adjustable
	Viewing Angle (H/V°)	160°	160°
	Center Point Deviation	<3%	<3%
	Brightness/Color Uniformity	≥97%	≥97%
	Contrast Ratio	4000:1	4000:1
Electrical Parameters	Max Power Consumption (W/m ²)	460	850
	Average Power Consumption (W/m ²)	160	380

Office Address: 8H Gangwan Blvd, 1401 Houhai Rd, Nanshan Dist, Shenzhen, China 518064

Manufacture: 5th Bld. Fulongte Tech. Park, Huaxing Rd, Dalang, Shenzhen, China 518109

Tel: +86 (0)755 2669 2768 Fax: +86 (0) 755 2669 2068

E-mail: sales@szwanliang.net Web: www.szwanliang.net

Shenzhen Wanliang Co., Ltd

	Voltage Range	AC100-240V, 50/60 (Hz)	AC100-240V, 50/60 (Hz)
	Security Features	GB4943/EN60950	GB4943/EN60950
Processing Performance	Frame Rate (Hz)	50&60	50&60
	Drive Mode	Constant Current Drive 1/16scans	Constant Current Drive 1/13scans
	Gray Scale	14bit	14bit
	Refresh Rate (Hz)	≥1920	≥1920
	Color Figures	16bit	16bit
Operating Parameters	Life Time (hrs)	50,000 hrs	50,000 hrs
	Operating Temperature /Humidity Range (°C/RH)	-10 - 40/10%-80% (non-condensing)	-10 - 40/10%-80% (non-condensing)
	Storage Temperature /Humidity Range (°C/RH)	-20 - 60/10%-85% (non-condensing)	-20 - 60/10%-85% (non-condensing)
	Certification	CE, ETC and etc.	CE, ETC and etc.

Office Address: 8H Gangwan Blvd, 1401 Houhai Rd, Nanshan Dist, Shenzhen, China 518064

Manufacture: 5th Bld. Fulongte Tech. Park, Huaxing Rd, Dalang, Shenzhen, China 518109

Tel: +86 (0)755 2669 2768 Fax: +86 (0) 755 2669 2068

E-mail: sales@szwanliang.net Web: www.szwanliang.net